

Instructies voor installatie
Instructions d'installation
Installationsanleitung
Installation instructions

»»» Inductiekookplaat met afzuiging
Table de cuisson à induction avec extracteur
Induktionskochfeld mit integriertem Abzug
Induction hob with extractor

AKI580_---

AKI560_---




Recirculation
HF2031




OK!





Hob: 2-2N: 220-240V - 50/60 Hz - 7.6 kW
2N: 380-415V - 50/60 Hz - 7.6 kW
1N: 220-240V - 50/60 Hz - 7.6 kW

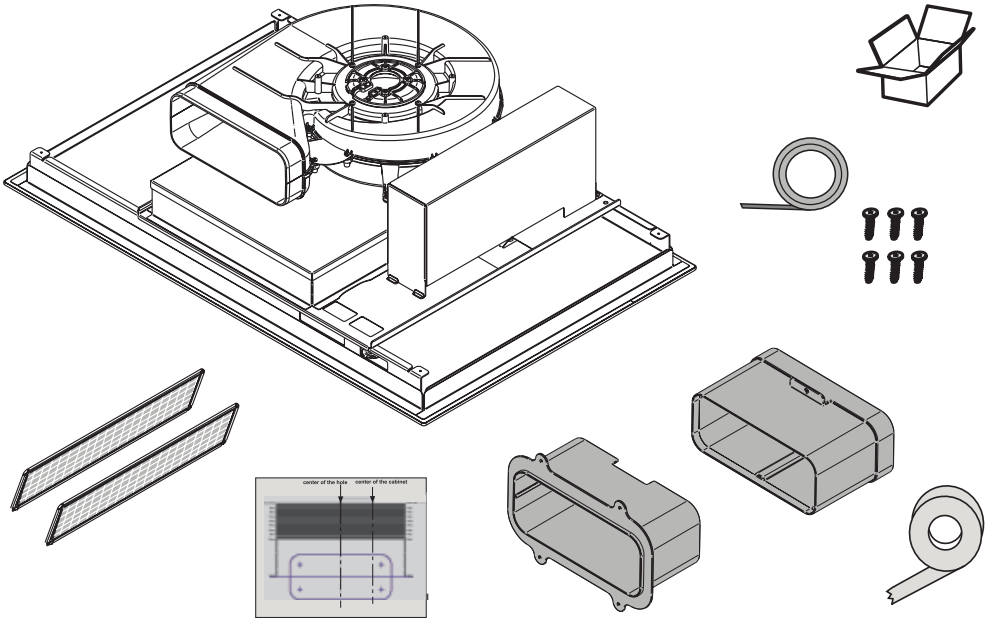


Vrije ruimte rondom toestel
Freier Raum rundum das Gerät
Free space around appliance
Espace libre autour de l'appareil

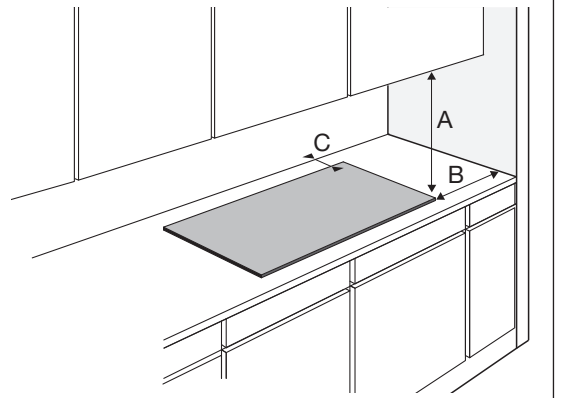


A (mm) B (mm) C (mm)
min. 550 min. 40 min. 25

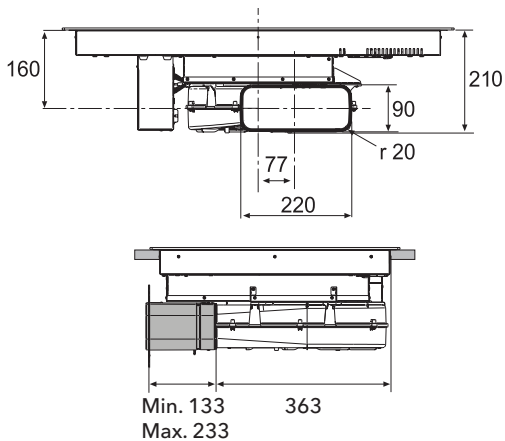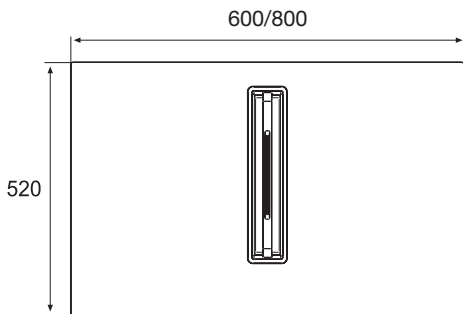


OPTION A

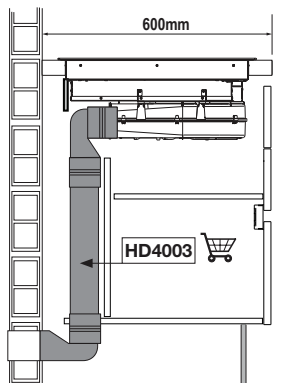


OPTION B

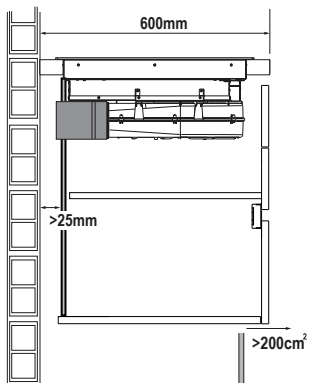

OPTION C

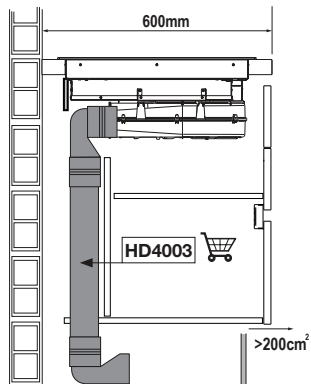


OPTION D

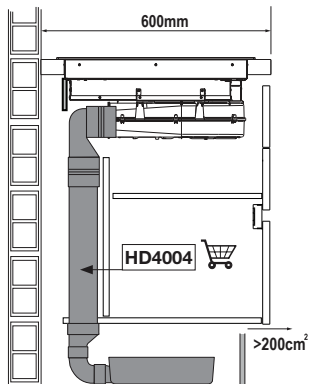


Flush top installation


	A (mm)	B (mm)
AKI560_...	560	604
AKI580_...	750	804

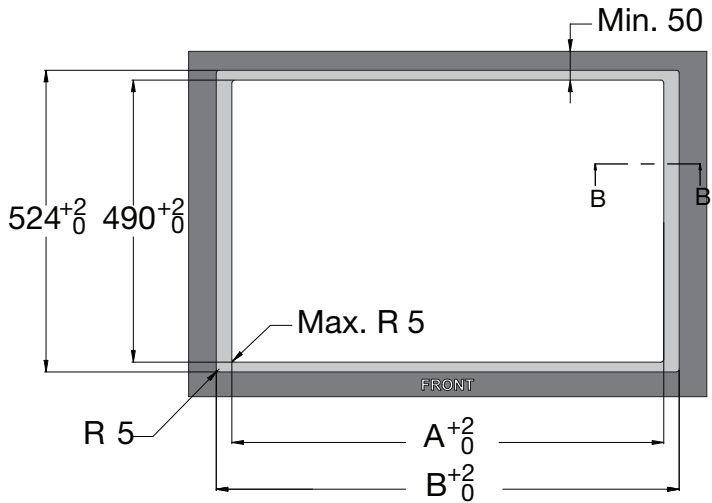



Standard installation

	A (mm)
AKI560_...	560
AKI580_...	750





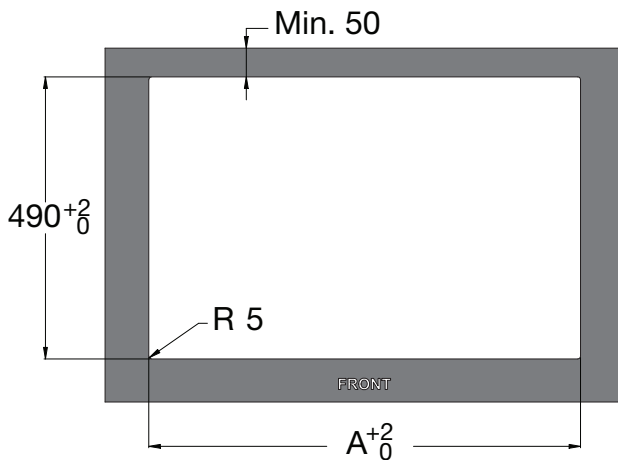





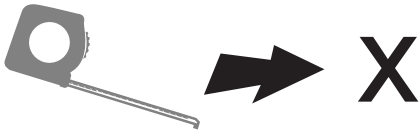



Top glass

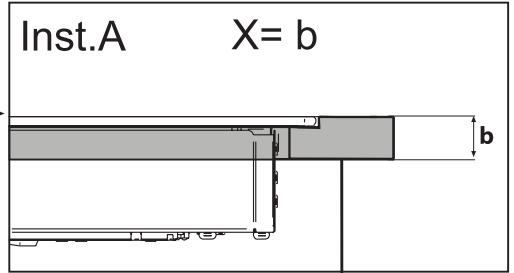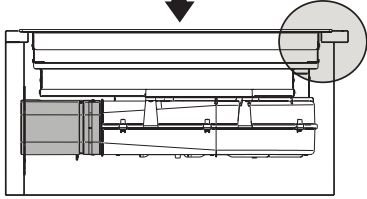

Top glass

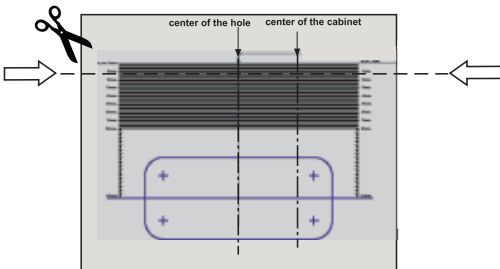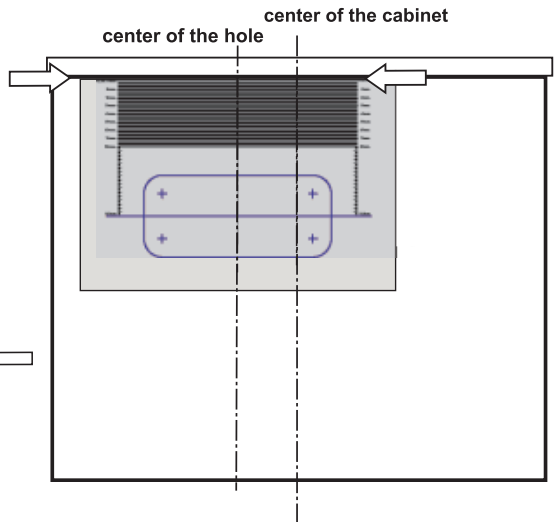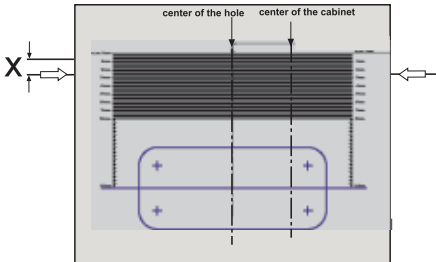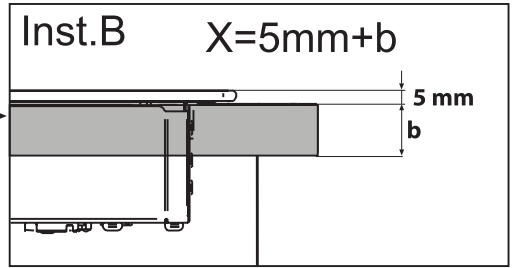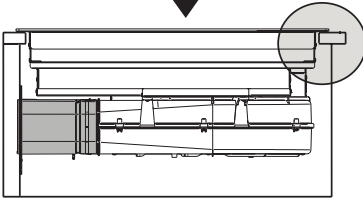

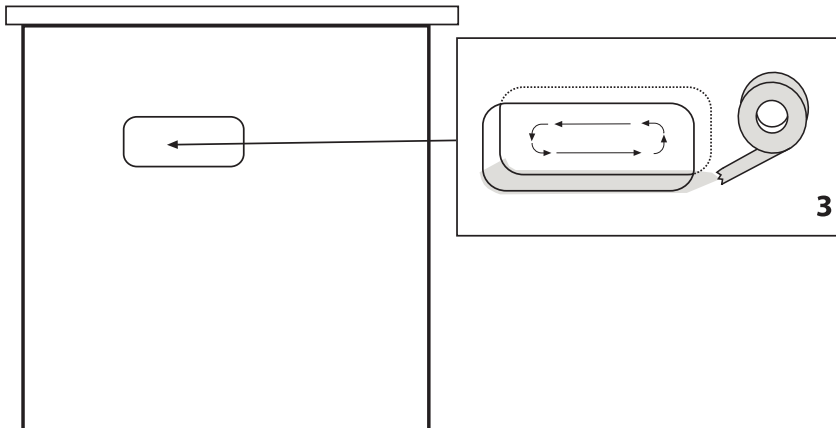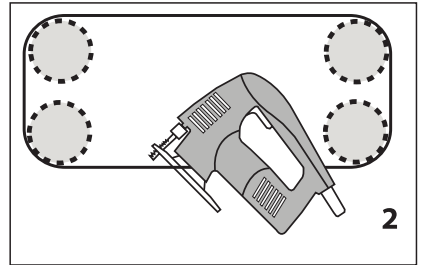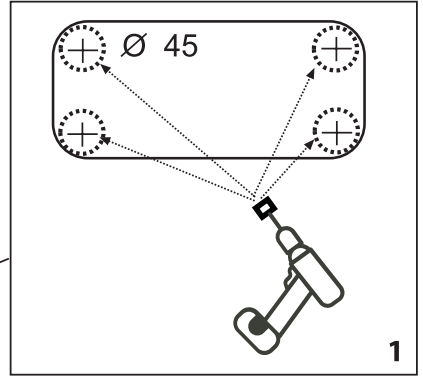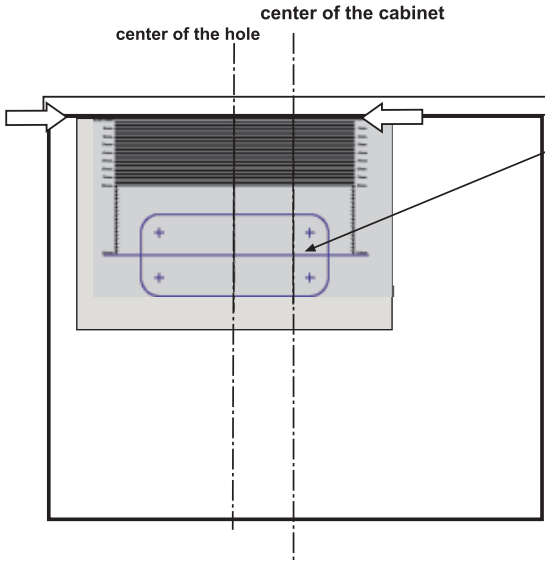


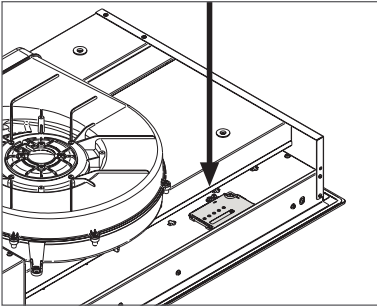

3N 380-415V 50/60Hz - 3x 16A ≡

- 3 fase - 1 nul
- 3 phases - 1 neutral
- 3 Phasen - 1 Nullanschluss
- 3 phases et 1 neutre


Aderdoorsnede
Aderquerschnitt 5x2,5 mm²
Cross sectional area
Fil diamètre

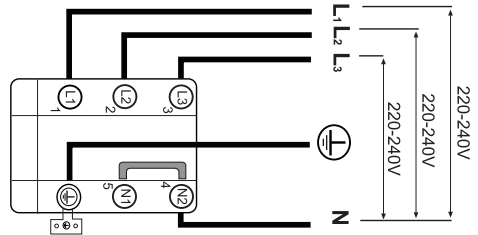

1N 220-240V 50/60Hz - 1x 32A ≡

- 1 fase - 1 nul
- 1 phase - 1 neutral
- 1 Phase - 1 Nullanschluss
- 1 phase et 1 neutre


Aderdoorsnede
Aderquerschnitt 3x4 mm²
Cross sectional area
Fil diamètre

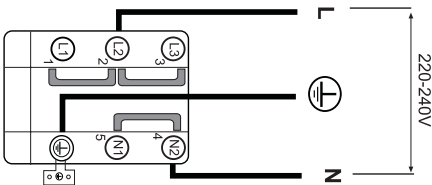


2-2N 230V 50Hz - 2x 16A ≡

- 2 fase - 2 nullen
- 2 phases - 2 neutral
- 2 Phasen - 2 Nullanschlusse
- 2 phases et 2 neutres

Aderdoorsnede
Aderquerschnitt 5x2,5 mm²
Cross sectional area
Fil diamètre

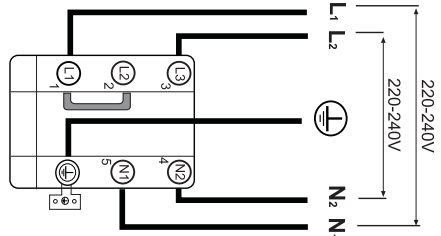

only NL / alleen NL

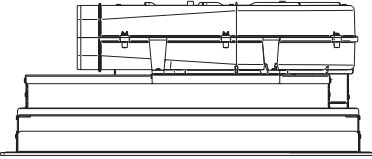


1









2







360°

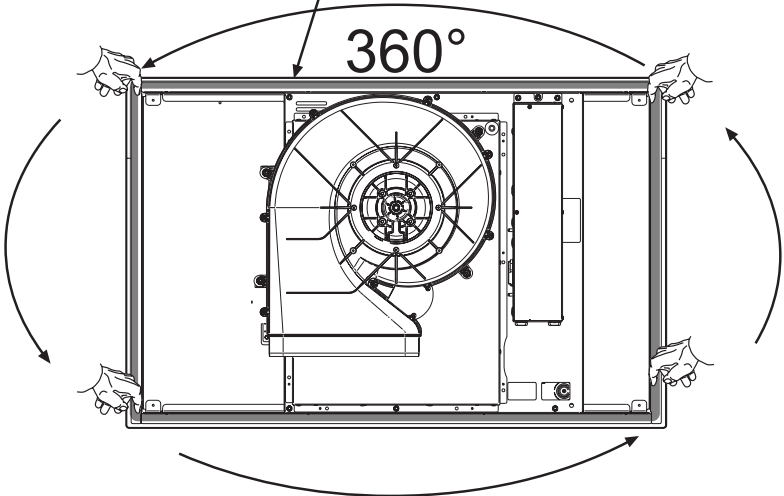


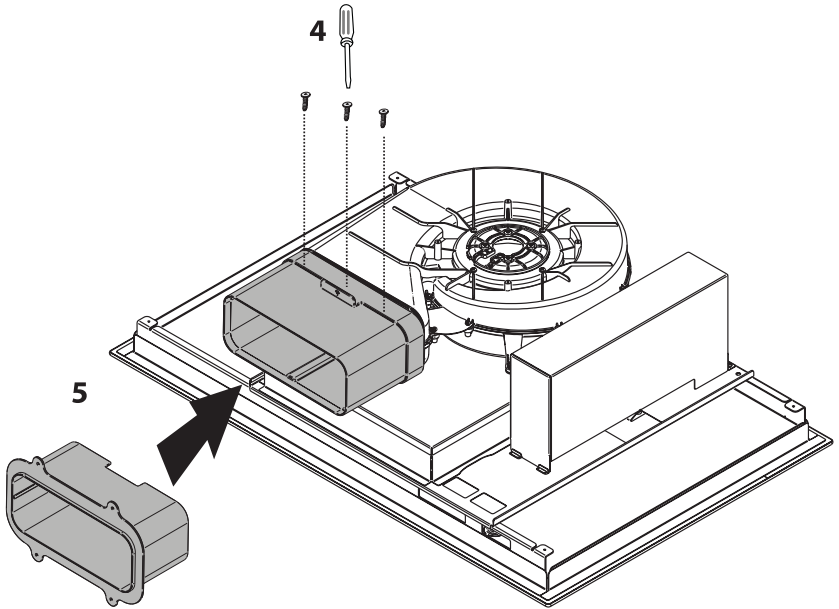
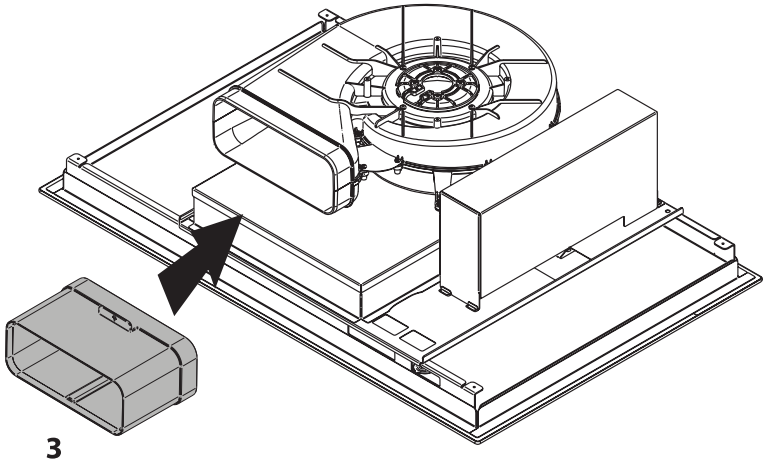


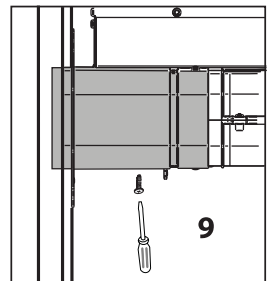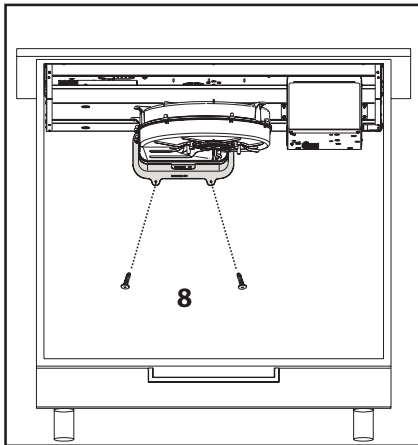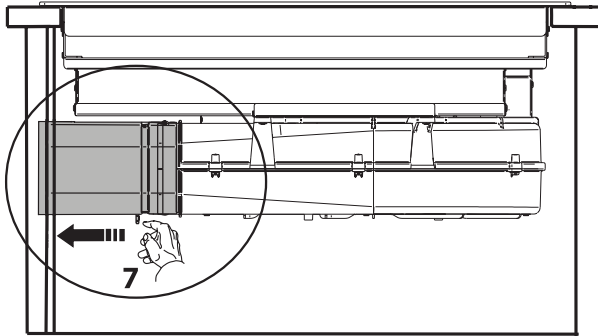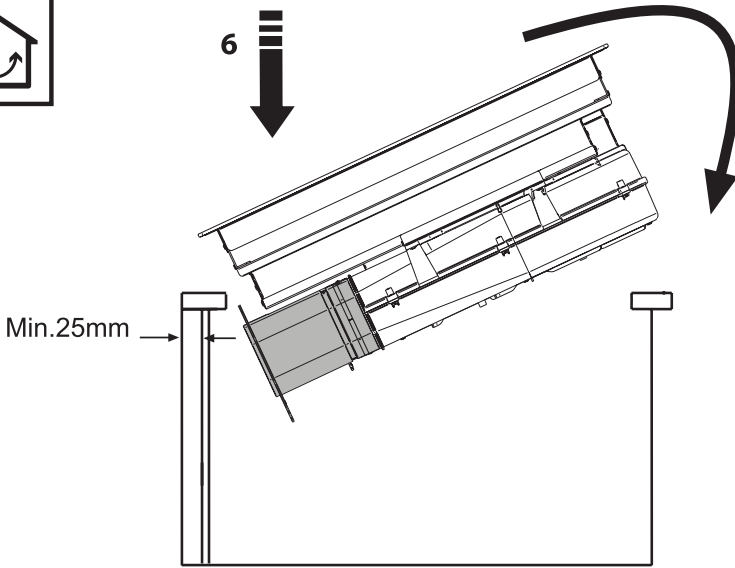

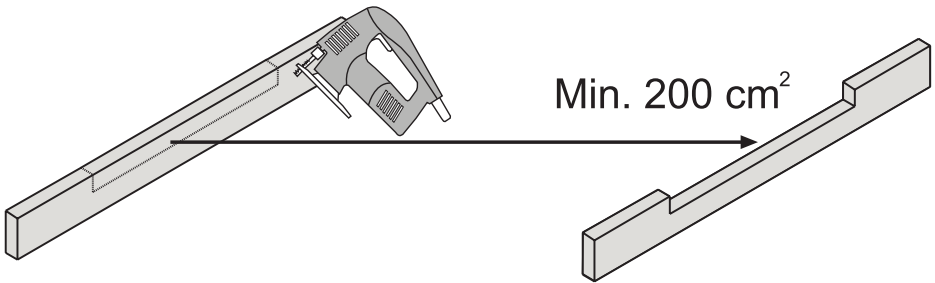



Controleer de correcte werking van het toestel.
Vérifier le bon fonctionnement de l'appareil.
Überprüfen Sie die korrekte Funktion des Geräts.
Verify the correct functioning of the appliance.

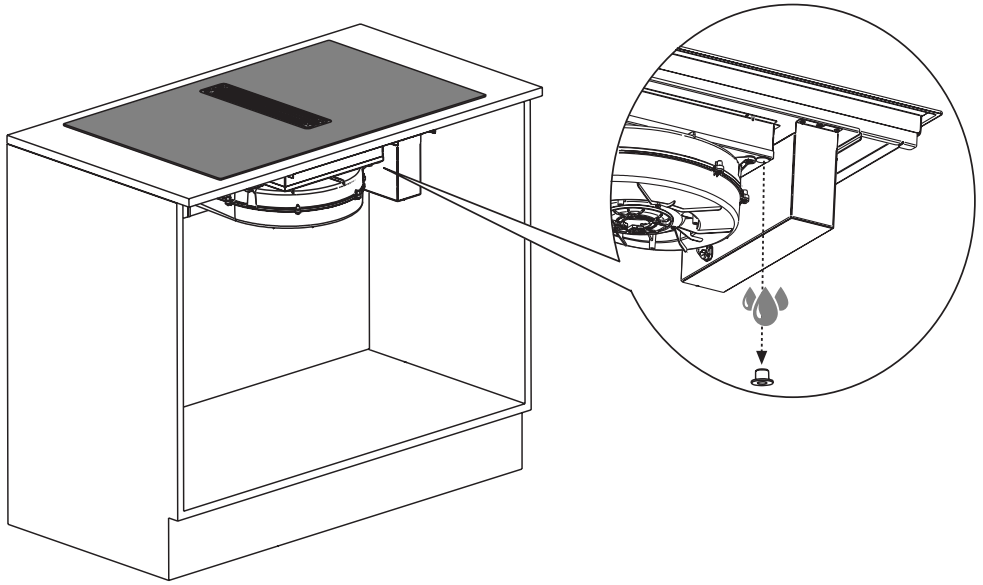

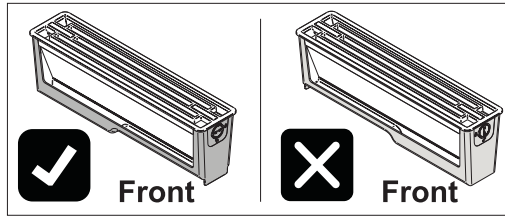

Twin-filters / Twin filters / Filtres « Twin » / Twin-Filter





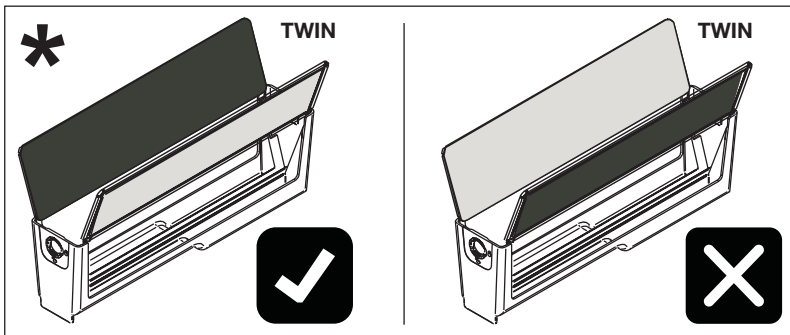
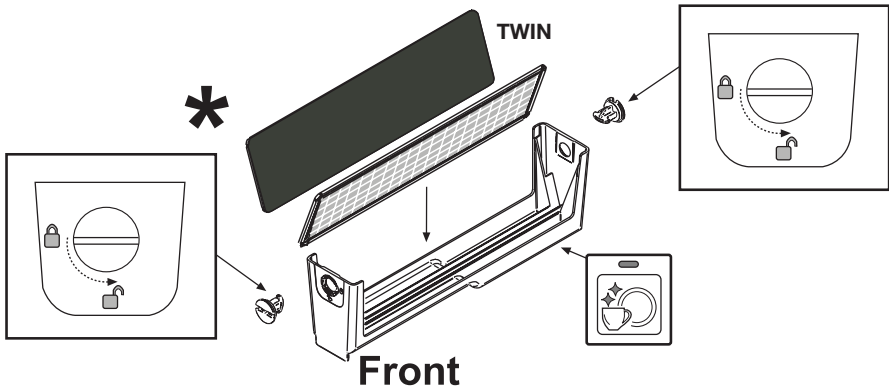







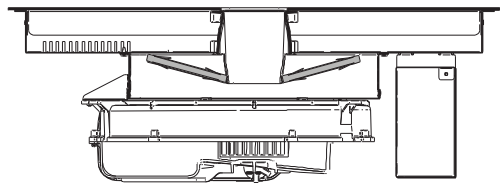
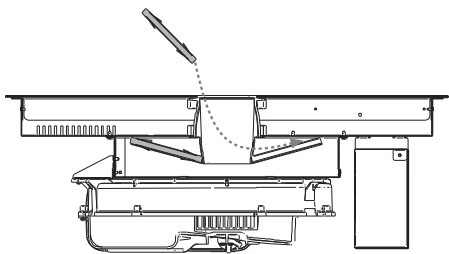
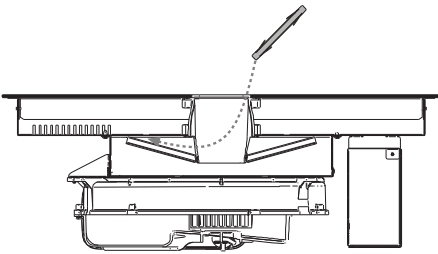
HF2031

Gescheiden geurgilters / Separate odour filters

Filtres anti-odeurs séparés / Separaten Geruchsfilter

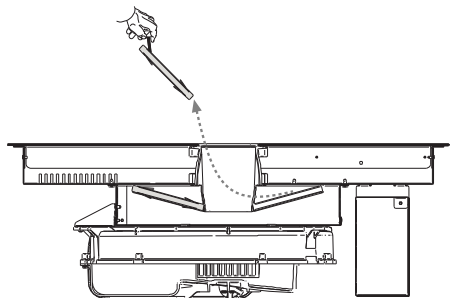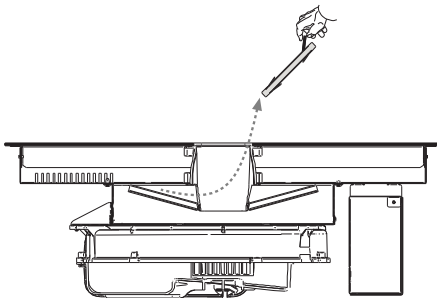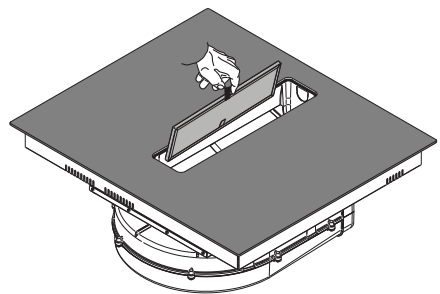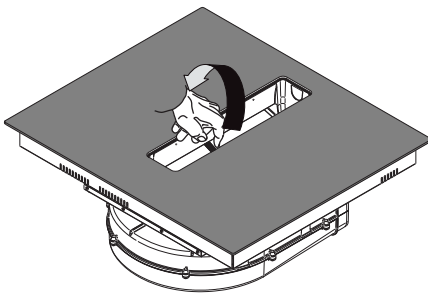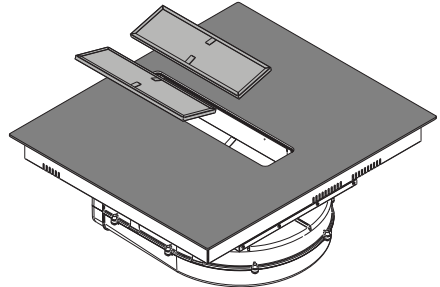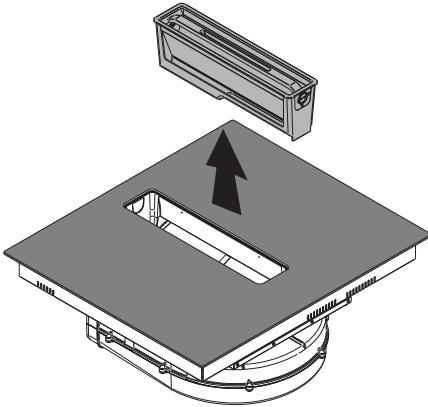

<p>1 ✓</p>  <p>Max. 65°</p>	<p>2 ✓</p>  <p>1H - Max. 80°</p>
<p>Elke 120 uur Tous les 120 heures Alle 120 Stunden Every 120 hours</p>	<p>Max. 7x</p>  <p>HF2031</p>



Op onze website kunt u de meest recente versie van het installatievoorschrift vinden.

You can find the most recent version of the installation instructions on our website.

Die neueste Version der Installationsanleitung finden Sie auf unserer Website.

Vous pouvez trouver la version la plus récente des instructions d'installation sur notre site Web.

www.etna.nl
www.etna.be



939205

939205 / VER 2 / 30-09-2025

 **ETNA®**